



# CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

## SURFACE MOUNT SWITCHING DIODE ARRAY

VOLTAGE 80 Volts CURRENT 250 mAmpere

MMBD4448HADWGP

### APPLICATION

- \* Fast high speed switching

### FEATURE

- \* Small surface mounting type. (SC-88/SOT-363)
- \* High speed. ( $T_{RR}=4.0nSec$  Max.)
- \* Fast Switching Speed.
- \* Ultra-Small Surface Mount Package.
- \* For General Purpose Switching Applications.
- \* High Conductance.

### CONSTRUCTION



- \* Silicon epitaxial planar

### MARKING

- \* DS




SC-88/SOT-363



Dimensions in millimeters

SC-88/SOT-363

### CIRCUIT



### MAXIMUM RATINGS ( At $T_A = 25^{\circ}C$ unless otherwise noted )

RATINGS	SYMBOL	MMBD4448HADWGP	UNITS
Maximum Non-Repetitive Peak Reverse Voltage	$V_{RM}$	100	Volts
Maximum Repetitive Peak Reverse Voltage Maximum Working Peak Reverse Voltage Maximum DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_{DC}$	80	Volts
Maximum RMS Voltage	$V_{RMS}$	57	Volts
Maximum Average Forward Rectified Current	$I_O$	250	mAmps
Repetitive Peak Forward Current	$I_{FRM}$	500	mAmps
Peak Forward Surge Current at 1uSec.	@ 1Sec	2.0	Amps
	@ 1.0uSec	4.0	
Total Capacitance	$C_T$	3.5	pF
Maximum Reverse Recovery Time	$t_{rr}$	4.0	nSec
Maximum Thermal Resistance	$R_{\theta JA}$	625	$^{\circ}C/W$
Maximum Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to +150	$^{\circ}C$

### ELECTRICAL CHARACTERISTICS ( At $T_A = 25^{\circ}C$ unless otherwise noted )

CHARACTERISTICS	SYMBOL	MMBD4448HADWGP	UNITS
Maximum Instantaneous Forward Voltage	@ $I_F = 5.0$ mA	0.72	Volts
	@ $I_F = 100$ mA	1.0	
Maximum Average Reverse Current (Note 1)	$V_R = 20V$ @ $T_J = 25^{\circ}C$	25nA	uAmps
	$V_R = 75V$ @ $T_J = 150^{\circ}C$	50	
	$V_R = 25V$ @ $T_J = 150^{\circ}C$	30	

NOTES : 1. Short duration test pulse used to minimize self-heating effect.

2003-12

## RATING CHARACTERISTIC CURVES ( MMBD4448HADWGP )

FIG. 1 - FORWARD CHARACTERISTICS

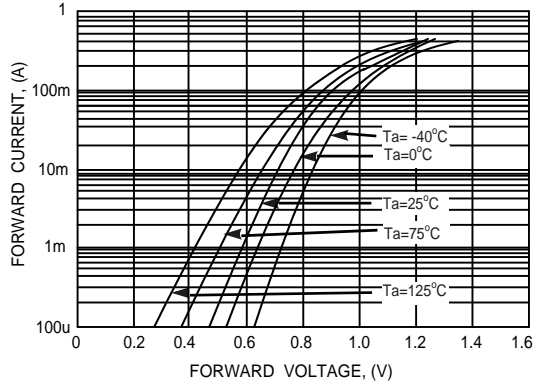


FIG. 2 - REVERSE CHARACTERISTICS

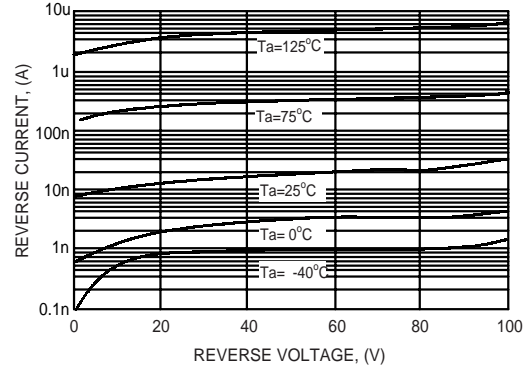


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

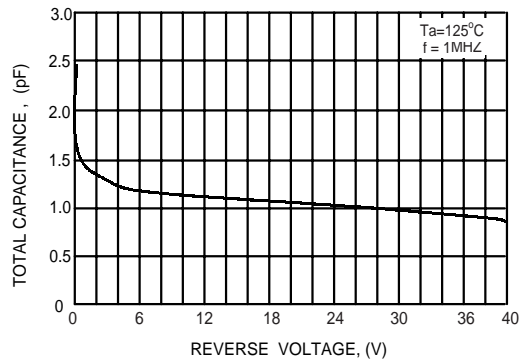


FIG. 4 - TYPICAL FORWARD CURRENT DERATING CURVE

