



CHENMKO ENTERPRISE CO.,LTD

Halogens free devices

**SURFACE MOUNT
SWITCHING DIODE**

VOLTAGE 20 Volts CURRENT 0.1 Ampere

CH204KGP

APPLICATION

- * Bias circuit.
- * Protection circuits.

FEATURE


- * Small surface mounting type. (SOT-23)
- * Two diode elements are connected in series (VFX2) per circuit.
- * Maximum total power dissipation is 200mW.
- * Peak forward current is 200mA.

CONSTRUCTION


- * Silicon epitaxial planar

MARKING


- * A7

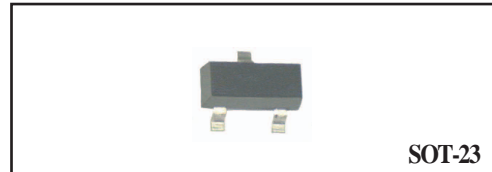

SOT-23

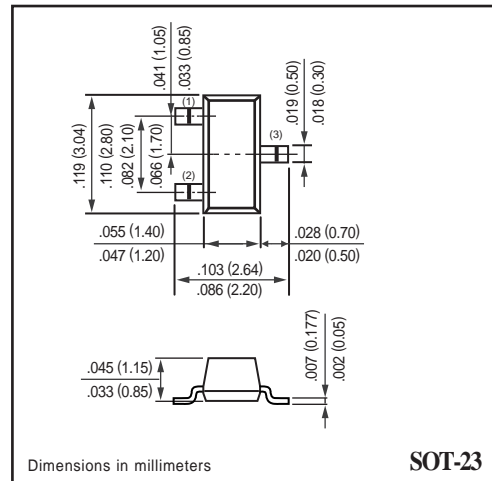

CIRCUIT



MAXIMUM RATINGS (At $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	CH204KGP	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	20	Volts
Maximum RMS Voltage	VRMS	14	Volts
Maximum DC Blocking Voltage	VDC	20	Volts
Maximum Average Forward Rectified Current	IO	0.1	Amps
Peak Forward Surge Current at 1 uSec	IFSM	0.3	Amps
Typical Junction Capacitance between Terminal (Note 1)	CJ	2.0	pF
Maximum Operating Temperature Range	TJ	+150	$^{\circ}\text{C}$
Storage Temperature Range	TSTG	-55 to +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (At $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	CH204KGP	UNITS
Maximum Instantaneous Forward Voltage at $I_F = 10\text{mA}$	V _F	1.00	Volts
Maximum Average Reverse Current at $V_R = 15\text{V}$	I _R	0.1	uAmps

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 6.0 volts.
2. ESD sensitive product handling required.

RATING CHARACTERISTIC CURVES (CH204KGP)

FIG. 1 - FORWARD CHARACTERISTICS

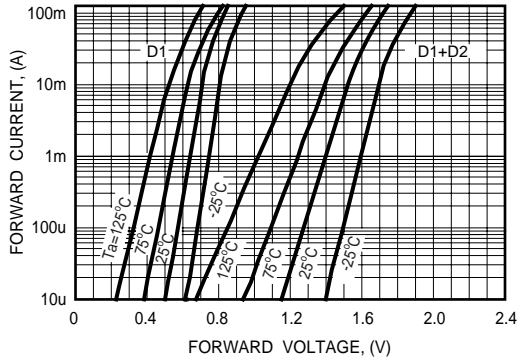


FIG. 2 - FORWARD CHARACTERISTICS

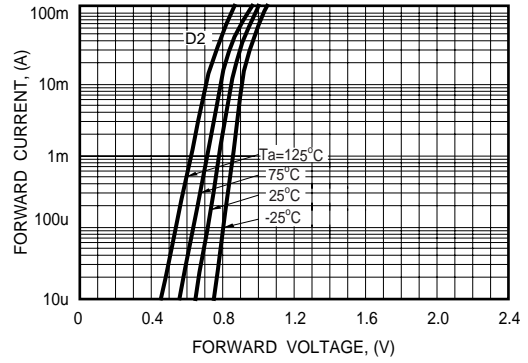


FIG. 3 - REVERSE CHARACTERISTICS

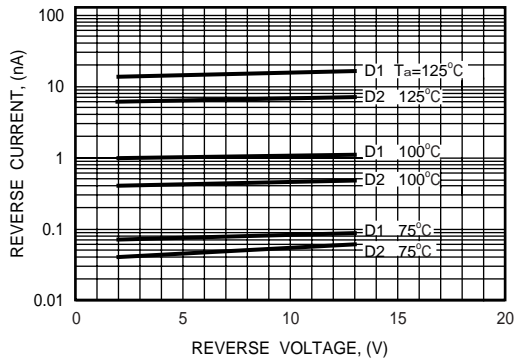


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

